
## CT-HSK-A

**COOLANT TUBE FOR HSK HOLDERS**



**Application**:
For the coolant supply through the centre of HSK toolholders.




ISO 12164-1 | DIN 69893-1 | HSK-A

| Order no. | Taper | D | d | L |
|---|---|---|---|---|
| **CT.HSK.63A** | HSK 63 | M18 × 1 | 12 | 34,5 |
| **CT.HSK.100A** | HSK 100 | M24 × 1,5 | 16 | 44,0 |


Note: **Axial sealed with two O-rings.**
**After mounting, the coolant tube can be moved only to a minimum degree according to DIN (±1°).**

## K-CT-HSK-A

**WRENCH FOR COOLANT TUBE FOR HSK-A HOLDERS**



**Application**:
For mounting the coolant tubes in HSK toolholders.

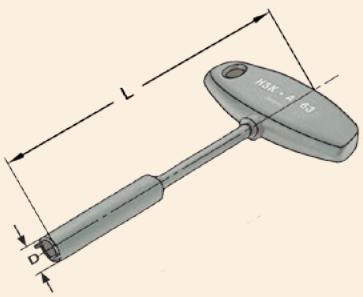


ISO 12164-1 | DIN 69893-1 | HSK-A

| Order no. | Taper | D | L |
|---|---|---|---|
| **K.CT.HSK.63A** | HSK 63 | 16,5 | 136 |
| **K.CT.HSK.100A** | HSK 100 | 22,0 | 136 |