

E286


DORMER

HSS-E Thread Forming TiN Coated Tap, Oil-Grooves, UNF, DIN Standard

High performance fluteless tap for blind and through holes. Provide strong, clean, chip-free and accurate threads with excellent tolerance. Highly versatile for steel, stainless steel and non-ferrous metal. TiN coated for higher cutting speeds and extend tool life. With oil-grooves for better lubrication in deep holes.



UNF	DIN 2184-1	2BX
	3.5×D	HSS-E
C 2-3.5		R

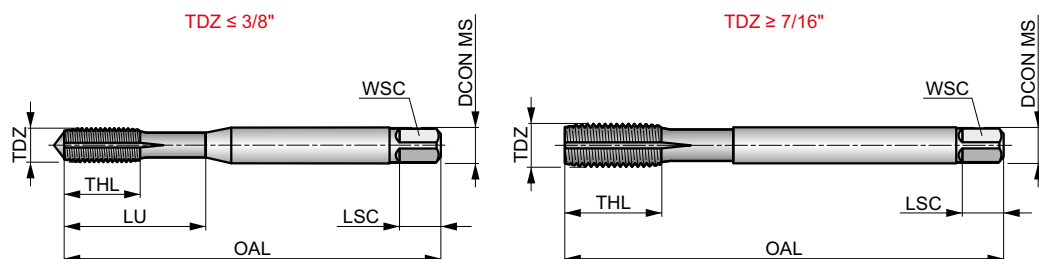

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 45	P1.2 ■ 51	P1.3 ■ 51	P2.1 ■ 51	P2.2 ■ 45	P2.3 ■ 40	P3.1 ■ 29	P3.2 ■ 24	P3.3 ■ 20	P4.1 ■ 18	P4.2 ■ 15	M1.1 ■ 25	M1.2 ■ 21	M2.1 ■ 22
M2.2 ■ 18	M2.3 ■ 15	M3.1 ■ 17	M3.2 ■ 15	M3.3 ■ 14	M4.1 ■ 10	N1.1 ■ 55	N1.2 ■ 41	N1.3 ■ 28	N2.1 ■ 62	N2.2 ■ 55	N2.3 ■ 40	N3.1 ■ 40	N3.3 ■ 12

Product	TDZ	TPI	TD	OAL	THL	DCON MS	WSC	LSC	NOF	PHD	LU
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
E2864-48	4	48	2.845	56.0	9	3.50	2.70	6	4	2.60	18.00
E2866-40	6	40	3.505	56.0	11	4.00	3.00	6	4	3.20	20.00
E2868-36	8	36	4.166	63.0	12	4.50	3.40	6	5	3.90	21.00
E28610-32	10	32	4.826	70.0	13	6.00	4.90	8	5	4.50	25.00
E2861/4	1/4	28	6.350	80.0	15	7.00	5.50	8	5	6.00	30.00
E2865/16	5/16	24	7.938	90.0	18	8.00	6.20	9	5	7.50	35.00
E2863/8	3/8	24	9.525	100.0	20	10.00	8.00	11	5	9.10	39.00
E2867/16	7/16	20	11.112	100.0	20	8.00	6.20	9	5	10.60	—
E2861/2	1/2	20	12.700	100.0	21	9.00	7.00	10	5	12.10	—