

E292


DORMER



HSS-E Thread Forming TiN Coated Tap, Metric, DIN Standard

High performance fluteless tap to produce high quality thread in blind and through holes. Provides a strong, clean, chip-free and accurate thread with excellent tolerance. Highly versatile for steel, stainless steel and non-ferrous metal. TiN coated to allow higher cutting speeds, improve performance and extend tool life.

M	DIN 2174	6HX
	3×D	HSS-E
C 2-3.5		

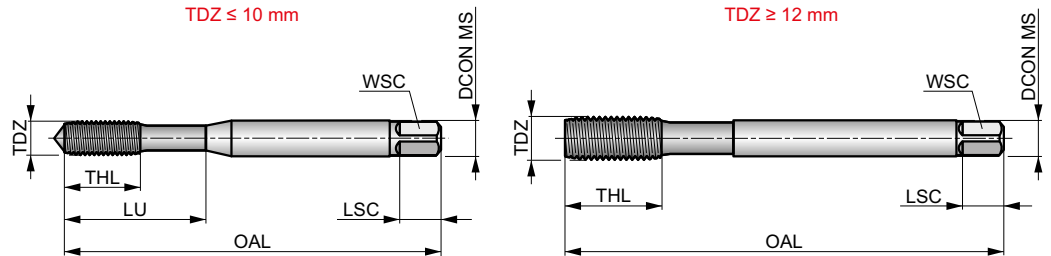

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 45	P1.2 ■ 51	P1.3 ■ 51	P2.1 ■ 51	P2.2 ■ 45	P3.1 ■ 29	P3.2 ■ 24	P3.3 ■ 18	P4.1 ■ 18	P4.2 ■ 13	M1.1 ■ 25	M1.2 ■ 21	M2.1 ■ 22	M2.2 ■ 18
M3.1 ■ 17	M3.2 ■ 15	M3.3 ■ 12	M4.1 ■ 8	N1.1 ■ 55	N1.2 ■ 41	N1.3 ■ 28	N2.1 ■ 62	N2.2 ■ 55	N2.3 ■ 40	N3.1 ■ 36	N3.3 ■ 12		

Product	TDZ	TP	OAL	THL	DCON MS	WSC	LSC	NOF	PHD	LU
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
E292M1.6	1.6	0.35	40.0	8	2.50	2.10	5	3	1.40	—
E292M2	2	0.40	45.0	6	2.80	2.10	5	3	1.80	11.00
E292M2.5	2.5	0.45	50.0	8	2.80	2.10	5	3	2.30	12.50
E292M3	3	0.50	56.0	9	3.50	2.70	6	4	2.80	18.00
E292M3.5	3.5	0.60	56.0	11	4.00	3.00	6	4	3.20	20.00
E292M4	4	0.70	63.0	12	4.50	3.40	6	5	3.70	21.00
E292M5	5	0.80	70.0	13	6.00	4.90	8	5	4.60	25.00
E292M6	6	1.00	80.0	15	6.00	4.90	8	5	5.50	30.00
E292M8	8	1.25	90.0	18	8.00	6.20	9	5	7.40	35.00
E292M10	10	1.50	100.0	20	10.00	8.00	11	5	9.30	39.00
E292M12	12	1.75	110.0	23	9.00	7.00	10	5	11.20	—
E292M16	16	2.00	110.0	25	12.00	9.00	12	6	15.00	—