



**E570****DORMER****HSS Straight Flute Hand Tap, UN, ISO Standard**

A versatile tool, suitable for machine and also hand tapping. With a straight flute design and bottoming lead for blind and through holes.

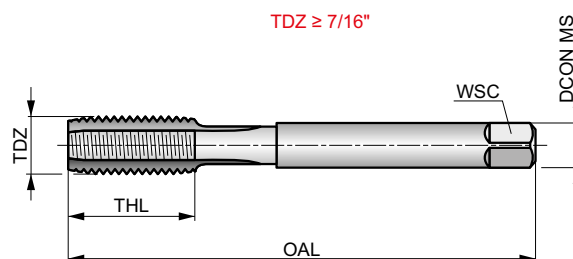

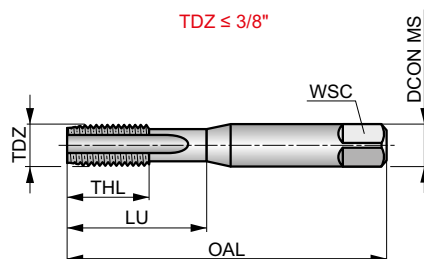

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 7	P1.2 ■ 7	P1.3 ■ 8	P2.1 ■ 6	P2.2 ■ 5	P2.3 ■ 4	P3.1 ■ 4	P3.2 ■ 4	P4.1 ■ 3	K1.1 ■ 12	K1.2 ■ 9	K1.3 ■ 7	K2.1 ■ 12	K2.2 ■ 10
K3.1 ■ 11	K3.2 ■ 8	K4.1 ■ 10	K4.2 ■ 8	K5.1 ■ 11	K5.2 ■ 9	N1.3 ■ 8	N2.1 ■ 11	N2.2 ■ 10	N2.3 ■ 7	N3.1 ■ 17	N3.2 ■ 10	N3.3 ■ 5	N4.2 ■ 5
N4.3 ■ 3													

Product	TDZ	TPI	TD	OAL	THL	DCON MS	WSC	NOF	PHD	LU
			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
E5701/4X32N03	1/4	32	6.350	66.0	13	6.30	5.00	3	5.60	26.00
E5701/4X36N03	1/4	36	6.350	66.0	13	6.30	5.00	3	5.70	26.00
E5701/4X40N03	1/4	40	6.350	66.0	13	6.30	5.00	3	5.70	26.00
E5705/16X32N03	5/16	32	7.938	72.0	16	8.00	6.30	3	7.20	29.00
E5703/8X32N03	3/8	32	9.525	80.0	18	10.00	8.00	3	8.80	32.00
E5707/16X24N03	7/16	24	11.112	85.0	19	8.00	6.30	3	10.00	—
E5707/16X28N03	7/16	28	11.112	85.0	19	8.00	6.30	3	10.20	—
E5701/2X28N03	1/2	28	12.700	89.0	22	9.00	7.10	3	11.80	—
E5709/16X24N03	9/16	24	14.288	95.0	24	11.20	9.00	4	13.25	—
E5705/8X24N03	5/8	24	15.875	102.0	24	12.50	10.00	4	14.80	—
E5703/4X20N03	3/4	20	19.050	112.0	29	14.00	11.20	4	17.80	—
E5707/8X20N03	7/8	20	22.225	118.0	30	16.00	12.50	4	21.00	—
E5701X14N03	1"	14	25.400	130.0	36	18.00	14.00	4	23.50	—
E5701.1/16X12N03	1.1/16	12	26.988	127.0	37	20.00	16.00	4	24.75	—
E5701.1/8X8N03	1.1/8	8	28.575	138.0	35	20.00	16.00	4	25.50	—
E5701.3/16X12N03	1.3/16	12	30.163	137.0	37	22.40	18.00	4	28.00	—
E5701.1/4X8N03	1.1/4	8	31.750	151.0	41	22.40	18.00	4	28.50	—
E5701.5/16X12N03	1.5/16	12	33.338	137.0	37	22.40	18.00	4	31.25	—