F75

P M K N S H


PRAMET


S




75° Finishing Boring Head, Small Bore - Ø24 up to Ø82 mm

High performance 75° small boring head for finishing. Suited for through and blind hole boring, chamfering by helical interpolation and cross hole boring. Available in CC.. and TC.. type inserts. Available for hole diameter range Ø24 up to Ø82 mm in sizes from 22 up to 42 mm. High accuracy and repeatability.

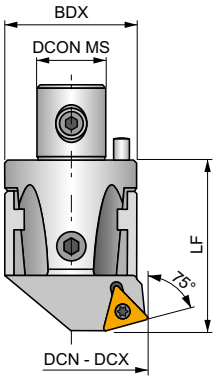





Product	CZC MS	DCN (mm)	DCX (mm)	BDX (mm)	DCON MS (mm)	LF (mm)						kg
A 02275 400	22	24.00	30.00	22	12.00	34.00	CC.. 0602..	US 0206-T08P	SDR T08P	HXK 2	HXK 3	0.10
A 02775 401	27	29.00	40.00	27	15.00	42.00	CC.. 0803..	US 0307-T10P	SDR T10P	HXK 2	HXK 4	0.17
A 02775 409	27	29.00	40.00	27	15.00	42.00	CC.. 09T3..	US 0408-T15P	SDR T15P	HXK 2	HXK 4	0.17
A 03275 401	32	39.00	50.00	32	20.00	45.00	CC.. 0803..	US 0307-T10P	SDR T10P	HXK 2.5	HXK 4	0.26
A 03275 409	32	39.00	50.00	32	20.00	45.00	CC.. 09T3..	US 0408-T15P	SDR T15P	HXK 2.5	HXK 4	0.26
A 04275 300	42	49.00	65.00	42	24.00	56.00	TC.. 16T3..	US 0307-T10P	SDR T10P	HXK 3	HXK 5	0.51
A 05475 300	54	63.00	82.00	54	28.00	66.00	TC.. 16T3..	US 0415-T15P	SDR T15P	HXK 3	HXK 6	1.01